

# ZXM8-GPLDD120 Series



18BB HALF-CELL N-Type TOPCon Bifacial Double Glass Monocrystalline PV Module

**600-635W**      **22.44%**      **0.40%**  
**POWER RANGE**      **MAXIMUM EFFICIENCY**      **YEARLY DEGRADATION**

**12** **12 YEARS PRODUCT WARRANTY**      **30** **30 YEARS OUTPUT GUARANTEE**



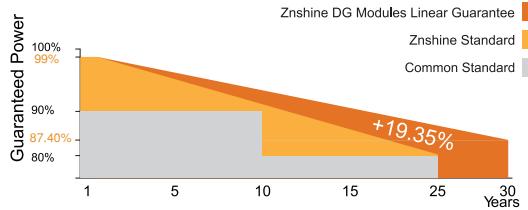
IEC 61215/IEC 61730/IEC 61701/IEC 62716

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

\*As there are different certification requirements in different markets, please contact your local Znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.



\*Please check the valid version of Limited Product Warranty which is officially released by ZNSHINE PV-TECH Co.,Ltd.

## KEY FEATURES



### Excellent Cells Efficiency

SMBB technology reduce the distance between busbars and finger grid line which is benefit to power increase.



### Anti PID

Ensured PID resistance through the quality control of cell manufacturing process and raw materials.



### TIER 1

Global, Tier 1 bankable brand, with independently certified advanced automated manufacturing.



### Bifacial Technology

Up to 25% additional power gain from back side depending on albedo.



### Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



### Adapt To Harsh Outdoor Environment

Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity environment.



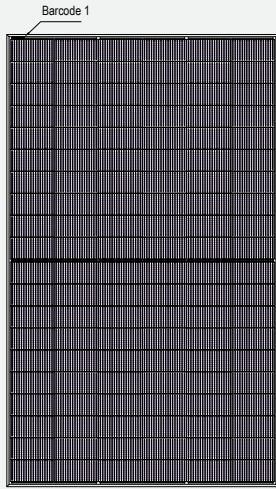
### Excellent Quality Management System

Warranted reliability and stringent quality assurances well beyond certified requirements.

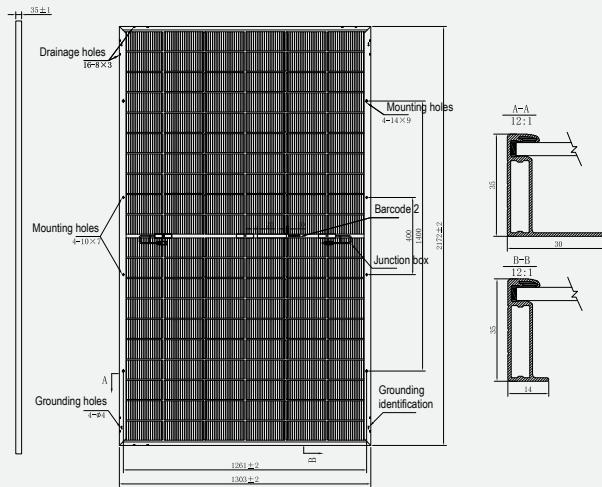


### Graphene Coating

Graphene coating modules can increase power generation and self-cleaning, also can save maintenance cost

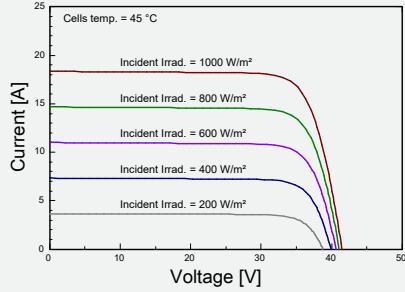
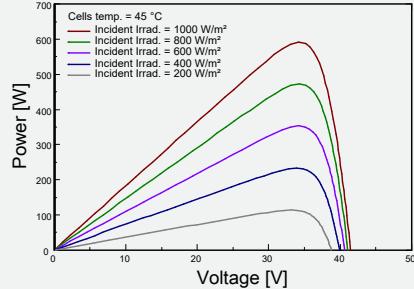
**DIMENSIONS OF PV MODULE(mm)**


Front View



Back View

\*Remark: customized frame color and cable length available upon request

**I-V CURVES OF PV MODULE(630W)**

**P-V CURVES OF PV MODULE(630W)**

**ELECTRICAL CHARACTERISTICS | STC\***

Nominal Power Watt Pmax(W)*	600	605	610	615	620	625	630	635
Maximum Power Voltage Vmp(V)	35.40	35.60	35.80	36.00	36.20	36.40	36.60	36.80
Maximum Power Current Imp(A)	16.95	17.00	17.04	17.09	17.13	17.18	17.22	17.26
Open Circuit Voltage Voc(V)	42.50	42.70	42.90	43.10	43.30	43.50	43.70	43.90
Short Circuit Current Isc(A)	17.94	17.99	18.04	18.09	18.14	18.19	18.24	18.29
Module Efficiency (%)	21.20	21.38	21.55	21.73	21.91	22.08	22.26	22.44

\*The data above is for reference only and the actual data is in accordance with the practical testing

\*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5

\*Measuring uncertainty: ±3%, all the electrical characteristics such as Power, Im, Vm and FF are within ±3% tolerance.

**MECHANICAL DATA**

Solar cells	N-type Monocrystalline
Cells orientation	120 (6x20)
Module dimension	2172×1303×35 mm (With Frame)
Weight	35±1 kg
Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	IP 68, 3 diodes
Cables	4 mm², 350 mm (With Connectors)
Connectors*	MC4-compatible

\*Please refer to regional datasheet for specified connector

**ELECTRICAL CHARACTERISTICS | NMOT\***

Maximum Power Pmax(Wp)	454.20	458.10	461.80	465.70	469.40	473.30	477.00	480.60
Maximum Power Voltage Vmpp(V)	33.30	33.50	33.70	33.90	34.10	34.30	34.40	34.60
Maximum Power Current Impp(A)	13.62	13.66	13.70	13.74	13.78	13.82	13.85	13.89
Open Circuit Voltage Voc(V)	40.20	40.40	40.60	40.80	40.90	41.10	41.30	41.50

\*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

**ELECTRICAL CHARACTERISTICS WITH 25% REAR SIDE POWER GAIN\***

Front power Pmax/W	600	605	610	615	620	625	630	635
Total power Pmax/W	750	756	763	769	775	781	788	794
Vmp/V(Total)	35.50	35.70	35.90	36.10	36.30	36.50	36.70	36.90
Imp/A(Total)	21.13	21.18	21.24	21.30	21.35	21.40	21.46	21.51
Voc/V(Total)	42.60	42.80	43.00	43.20	43.40	43.60	43.80	44.00
Isc/A(Total)	22.36	22.42	22.49	22.54	22.61	22.66	22.73	22.79

\*Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition.

It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

**TEMPERATURE RATINGS**
**WORKING CONDITIONS**

NMOT	43°C ±2°C	Maximum system voltage	1500 V DC
Temperature coefficient of Pmax	(-0.30±0.03)%/°C	Operating temperature	-40°C~+85°C
Temperature coefficient of Voc	-0.25%/°C	Maximum series fuse	35 A
Temperature coefficient of Isc	0.046%/°C	Front Side Maximum Static Loading	Up to 5400Pa
Refer.Bifacial Factor	(80±10)%	Rear Side Maximum Static Loading	Up to 2400Pa

\*Remark: Do not connect Fuse in Combiner Box with two or more strings in parallel connection

**PACKAGING CONFIGURATION \***

Piece/Box	31
Piece/Container(40'HQ)	558

\*Customized packaging is available upon request.

\*Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.

They only serve for comparison among different module types.

\*Caution: Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.



Add : 1#, Zhixi Industrial Zone, Jintan Jiangsu 213251, P.R. China



Tel: +86 519 6822 0233



E-mail: info@znshinesolar.com

Note: Specifications included in this datasheet are subject to change without notice. ZNSHINE reserves the right of final interpretation © ZNSHINE SOLAR 2023 | Version: ZXM8-GPLDD120 2304.E

No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document